



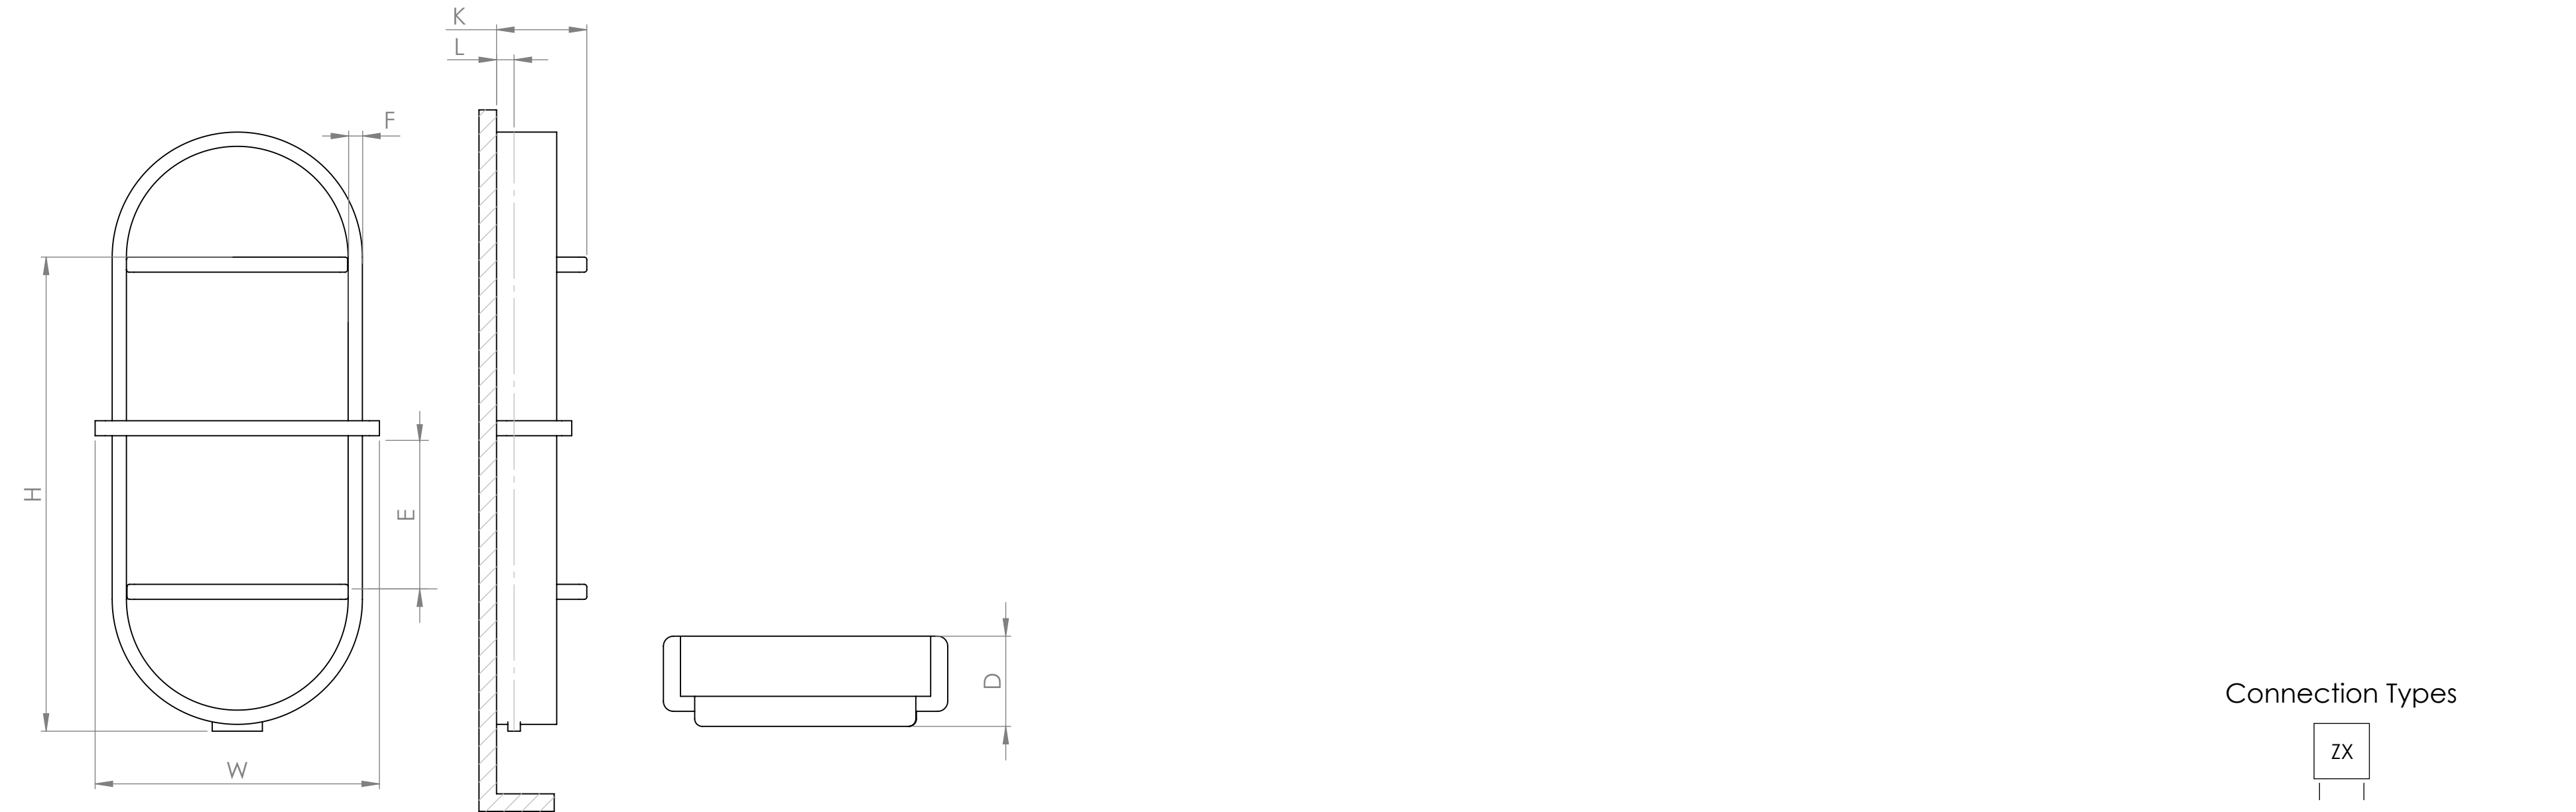

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	G Space Between Two Groups (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Quinn 500	1 (1)	500	825	50	150	25	250	N/A	150	35	0	304	603	784	941	3209	6,99	8,36	1,04	0,14	925 x 640 x 225
	3(1+1+1)	500	1175	50	150	25	300	N/A	150	35	0	401	795	1034	1241	4232	9,34	11,15	1,42	0,19	1275 x 640 x 225
	5 (1+1+1+1+1)	500	1625	50	150	25	250	N/A	150	35	0	264	524	682	818	2790	11,69	14,06	1,80	0,25	1725 x 640 x 225